


PF-56 PF-66
SPEAKER

5" 6" 6W 100V LINE FRAMELESS CEILING SPEAKER
(WITHOUT BACKBOX)

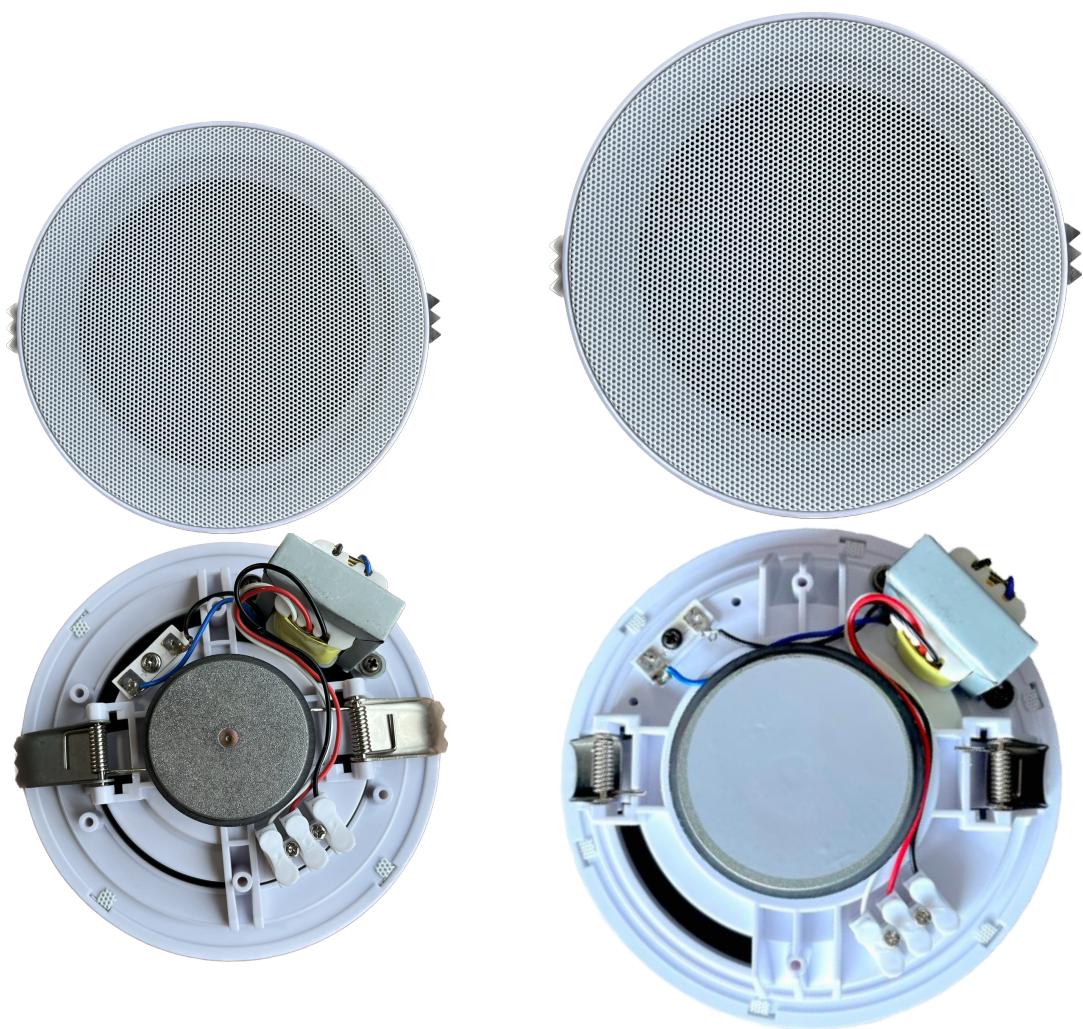

- PF-56** 5" 6W 100V LINE WITH ALUMINIUM GRILLE
- PF-66** 6" 6W 100V LINE WITH ALUMINIUM GRILLE

Frameless Ceiling Speaker for Modern Interiors
Engineered without a traditional backbox, this frameless ceiling speaker leverages the ceiling cavity itself as an acoustic chamber, effectively eliminating unwanted sound reflections while delivering rich, balanced audio performance.

Ideal for spaces with modern aesthetics and limited ceiling depth, it requires only 70mm to 90mm of clearance between the ceiling slab and surface—making it perfect for thin-ceiling installations.

Despite its slim profile, the speaker maintains exceptional sound quality and offers an enhanced frequency response, making it an excellent choice for background music (BGM) applications. Its minimalist design seamlessly integrates into contemporary environments, providing both aesthetic appeal and outstanding audio performance.

Technical Specifications

	PF-56	PF-66
Power Handling Capacity	6W 100V	6W 100V
Speaker Driver Type	Paper Cone	Paper Cone
Speaker Driver Size	5"	6"
Sensitivity	93dB (1W,1m)	93dB (1W,1m)
Frequency Response	100 -18 KHz	90 -18 KHz
Transformer Tapping (100V Line)	6W/3W/1.5W	6W/3W/1.5W
Primary Impedance Of Tapping (Ohm)	1667/3334/6667Ohm	1000/2000/4000Ohm
Secondary Impedance (Ohm)	8 Ohm	8 Ohm
Material	ABS/ Alluminium	ABS/ Alluminium
Overall Size	175MM (D) x 60MM (H)	188MM (D) x 76MM (H)
Mounting Hole Size	140MM	170MM
Weight	0.5 KG	0.7 KG

